RoHS COMPLIANT

1 OF 1

REV.	REVISION	DATE

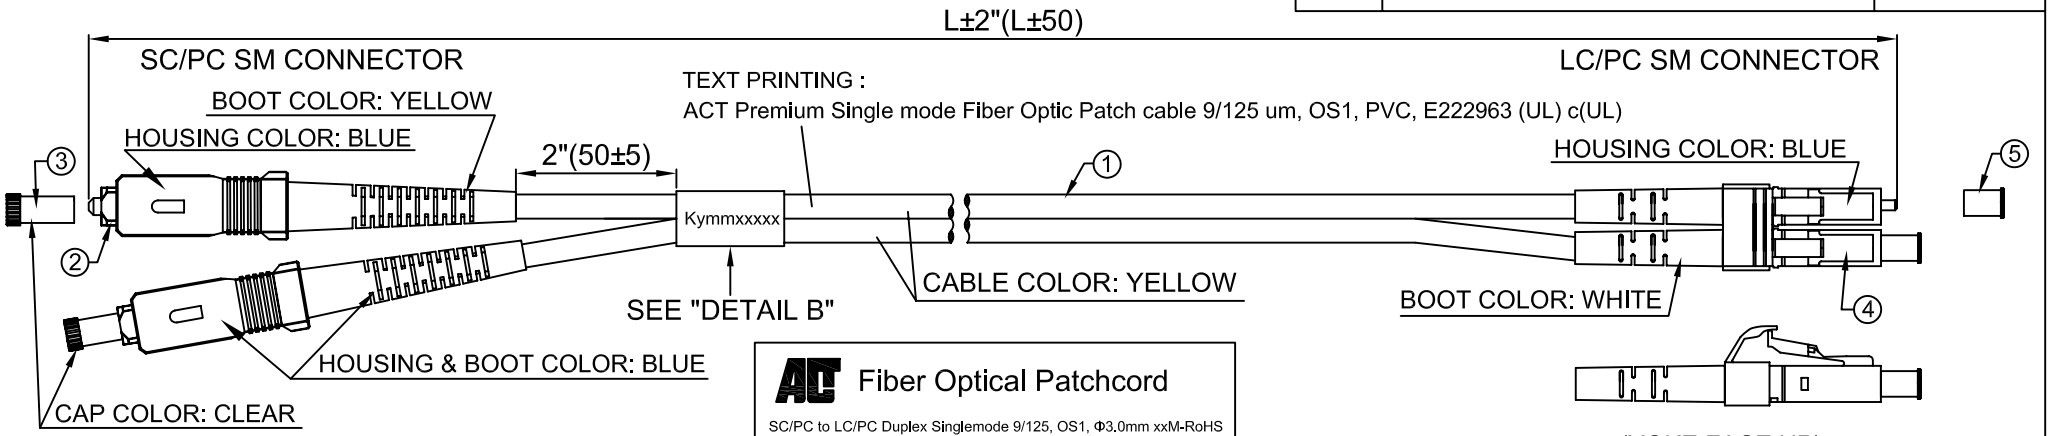

NOTE:
1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE SCRENGH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TESC CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

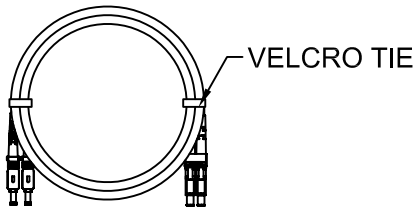

DETAIL A

SEE TABLE "DESCRIPTION 1"

Fiber Optical Patchcord

SC/PC to LC/PC Duplex Singlemode 9/125, OS1, Φ3.0mm xxM-RoHS

Model: xxxxx -xxxxxx

Lot number:

PO/NO:

SEE TABLE "DESCRIPTION 2"

Performance: (@23℃) λ=850/1310±20nm

Serial No		Insertion Loss ≤ 0.3dB	
		850nm	1310nm
Kymmxxxxx	A		
	B		
	C		
	D		

Prepared By: _____ Date: _____

DETAIL C



DETAIL B
y: Year; mm: Month
xxxxx: Serial Number

RL8920	20	20	65.6'(20000)	941220-RL8920	8716065224597
RL8915	15	15	49.2'(15000)	941215-RL8915	8716065224580
RL8910	10	10	32.8'(10000)	941210-RL8910	8716065224573
RL8905	05	5	16.4'(5000)	941205-RL8905	8716065224566
RL8903	03	3	9.84'(3000)	941203-RL8903	8716065224559
RL8902	02	2	6.56'(2000)	941202-RL8902	8716065224542
RL8951	51	1.5	4.92'(1500)	9412015-RL8951	8716065224535
RL8901	01	1	3.28'(1000)	941201-RL8901	8716065224528
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSCOMER APPROVAL: DATE:

ITEM	Q'TY	PART NO.	DESCRIPTION
5	2PCS		LC DUST COVER, WHITE.
4	2SETS		CONNECTOR: LC/PC SM BLUE HOUSING WITH WHITE BOOT.
3	2PCS		SC DUST COVER, CLEAR.
2	2SETS		CONNECTOR: SC/PC SM, BLUE HOUSING WITH YELLOW & BLUE BOOT.
1	1PC		CABLE: SINGLEMODE, 9/125um, 3.0mm ZIPCORD, OFNR, YELLOW JACKET.

PART LISC

UNIT: Inches[mm]		TITLE: PATCHCORD SC-LC SINGLEMODE DUPLEX 9/125, OS1, 3.0mm, YELLOW.	
DRAWN BY: Catherine	DATE: 2007/10/4	CUSCOMER	CUSCOMER PART NO.: RL89**
CHECKED BY	DATE	DRAWING NO.: PK709022	Ref. NO. / REV.: A
APPROVED BY	DATE		
SALE BY	DATE	TRENDEX PART NO.	